ALDEMIR SOUZA TIDE





MMC 887 PLATFORM SUPPLY VESSEL

Vessel Characteristics

Length, Overall:	285.8 ft	87.1 m				
Beam:	61.7 ft	18.8 m				
Depth:	24.3 ft	7.4 m				
Maximum Draft:	20 ft	6.1 m				
Light Draft:	7.6 ft	2.3 m				
Minimum Height:	91.2 ft	27.8 m				
Freeboard:	4.6 ft	1.4 m				
Displacement:	7,600 lt	7,720 mt				
Deadweight:	5,040 lt	5,120 mt				
Clear Deck Space:	196 x 52 ft	60 x 16 m				
Clear Deck Area:	9,980 ft²	930 m ²				
Deck Strength AFT:	1,020 lb/ft²	5 t/m²				
Class Notations:	ABS: +A1, (E), +AMS, +DPS-2, FFV-1, OSV, UWILD					

Capacities

Deck Cargo:	2,800 lt	2,840 t
Fuel Oil:	240,000 gal	910 m ³
Potable Water:	44,300 gal	170 m ³
Fresh Water:	530,000 gal	2,010 m ³
Drill/Ballast Water:	86,700 gal	330 m ³
Bulk Tanks (5 tanks):	14,700 ft³	420 m ³
Liquid Mud (2.4 SG*): *Max Structural Specific Gravity	15,200 bbl	2,410 m ³
Methanol:	2,700 bbl	430 m ³

TIDEWATER Find out more

tdw.com

Pg.2 Further Specifications Pg.3 General Arrangement

Pg.4 Capacity Table Pg.5 DP Capability Plot

NOTICE: The data contained herein is provided for convenience of reference to allow users to determine the suitability of the Company's equipment. The data may vary from the current condition of equipment which can only be determined by physical inspection. Company has exercised due dilig to insure that the data contained herein is reasonably accurate. However, Company does not warrant the accuracy or completeness of the data. In no event shall Company be liable for any damages whatsoever arising out of the use or inability to use the data contained herein.

ALDEMIR SOUZA TIDE Further specifications



Machinery

Diesel Electric Vessel					
Propulsive/Total HP:	5,360 / 10,200				
Z-Drives:	Yes				
Propellers (2):	4-Blade FP Rolls-Royce				
Kort Nozzles:			2		
Primary Generators (4):	1,820 kw	480 v	60 hz		
Driven by:	Cummins QSK60-D(M)				
Emergency Generators (1):	150 kw	480 v	60 hz		
Driven by:	Cummins 6CTA8.3-D(M)				
Bow Thruster (2):	1220 HP CPP TT, 1073 HP CPP DD				
Driven by:	ELECTRIC MOTOR DRIVEN				
Total Thrust:		28.7 st	26 mt		

Deck Equipment

Anchors (2):	5456 lbs HHP
Anchor Chain:	250 m of 50 mm chain per side
Windlass:	Electric, 65/32 kn @10/20 m/m
Crane (1):	2 t @ 10.1 m
Capstans (2):	7.5 t Electric, 328 ft. of .5 in.
Tugger (2):	10 t ELECTRIC, PLIMSOLL

Accommodations

No. of Berths:	60
Cabins:	8x1-man, 18x2-man & 4x4-man
Certified to Carry:	60
Galley seating:	30
Hospital:	Yes

Registration

Flag: VANUATU	Home Port: PORT VIL					
Hull Number: 1914		IMO N ^o : 9533684				
Year Built: 2012	Call Sign: YJRD					
Builder:		FUJIAN MAWEI				
Tonnage (ITC):	3601 GT	1429 NT				

$\mathbf{Performance}^*$

Fuel Consumption Vs Speed							
Maximum:	28 m³/day (310 gph) @ 14 knots						
Cruising:	12.5 m³/day (140 gph) @ 10 knots						
Economical:	10	m³/day (110 gph) @ 8 knots					
Standby:	2.3	m³/day (25 gph) @ 0 knots					
Range @ 10 Knots:	17,400 nm						
Transfer Rates							
Fuel Oil:	660 gpm @ 300 ft	150 m³/h @ 92 m					
Fresh Water:	660 gpm @ 300 ft	150 m³/h @ 92 m					
Drill/Ballast Water:	660 gpm @ 300 ft	150 m³/h @ 92 m					
Bulk:	49 cfm @ 180 ft	83.2 m³/h @ 56 m					
Liquid Mud:	660 gpm @ 190 ft	150 m³/h @ 58 m					
Methanol:	330 gpm @ 300 ft	75 m³/h @ 92 m					

Nav/Comms Equipment

Radar(s):	2
Depth Sounder:	1
Gyro Compass:	3
Wind Speed Indicators:	3
Doppler Log:	1
Radio:	3 x VHF; 1 x SSB

Special Equipment

Firefighting:	FiFi-1
Dynamic Positioning:	DP-2
Ref. Systems:	2 x MRU; 2 x DGPS 1 x Microwave-based; 1 x Laser-based
Water Maker:	2 X 20T/DAY
Mud Circulation System/ Mud Mixers:	Yes/Yes
Tank Cleaning:	Yes
Rescue Boat:	Solas Approved
Fuel Monitoring:	FUELTRAX
Reefer Sockets:	4x 32A 480V
Misc:	SEWAGE TREATMENT-60 Persons


*Approximate values assuming Ideal Conditions


tdw.com

NOTICE: The data contained herein is provided for convenience of reference to allow users to determine the suitability of the Company's equipment. The data may vary from the current condition of equipment which can only be determined by physical inspection. Company has exercised due diliger to insure that the data contained herein is reasonably accurate. However, Company does not warrant the accuracy or completeness of the data. In no event shall Company be liable for any damages whatspever arising out of the use or inability to use the data contained herein.

ALDEMIR SOUZA TIDE General Arrangement (Current configuration may vary.)



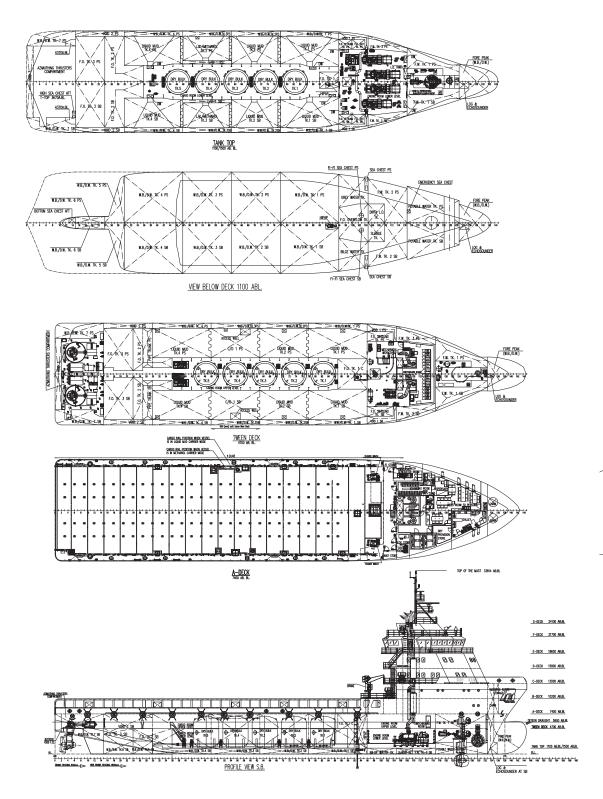

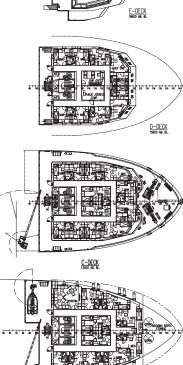

B-DECK

F-DECK

++++++ #6 100 10

tdw.com

ALDEMIR SOUZA TIDE Capacity Table



Fore Peak WB/DW Tk 1 PS WB/DW Tk 1 SB WB/DW Tk 2 PS WB/DW Tk 2 SB	Contents DW/WB DW/WB DW/WB DW/WB DW/WB DW/WB	Volume m ³ 184.0 184.0 180.9 152.5 152.5	Base Oil	Fuel Oil	Dry Bulk	DW/WB	Potable Water	Fresh Water	Brine	Liquid	Methanol	Lube Oil	Foam	Oil
WB/DW Tk 1 PS WB/DW Tk 1 SB WB/DW Tk 2 PS WB/DW Tk 2 SB	DW/WB DW/WB DW/WB DW/WB	184.0 180.9 152.5						mater		Mud		UII		Disp.
WB/DW Tk 1 SB WB/DW Tk 2 PS WB/DW Tk 2 SB	DW/WB DW/WB DW/WB DW/WB	180.9 152.5				184.0								
WB/DW Tk 2 PS WB/DW Tk 2 SB	DW/WB DW/WB DW/WB	152.5				184.0		184.0						
WB/DW Tk 2 SB	DW/WB DW/WB					180.9		180.9						
	DW/WB	152.5				152.5		152.5						
						152.5		152.5						
WB/DW Tk 3 PS	DW/MP	150.9				150.9		150.9						
WB/DW Tk 3 SB	DW/WD	150.9				150.9		150.9						
WB/DW Tk 4 PS	DW/WB	165.9				165.9		165.9						
WB/DW Tk 4 SB	DW/WB	165.9				165.9		165.9						
WB/DW Tk 5 PS	DW/WB	42.4				42.4		42.4						
WB/DW Tk 5 SB	DW/WB	42.4				42.4		42.4						
WB/DW Tk 6 PS	DW/WB	57.8				57.8		57.8						
WB/DW Tk 6 SB	DW/WB	57.8				57.8		57.8						
WB/DW Tk 7 PS	DW/WB	75.0				75.0								
WB/DW Tk 7 SB	DW/WB	69.3				69.3								
FW Tk 1 PS	FW	129.7						129.7						
FW Tk 1 SB	FW	129.7						129.7						
FW Tk 2 PS	FW	40.5						40.5						
FW Tk 2 SB	FW	40.5						40.5						
FW Tk 3 PS	FW	80.9						80.9						
FW Tk 3 SB	FW	80.9						80.9						
Potable Water Tk PS	Ships FW	83.7					83.7							
Potable Water Tk SB	Ships FW	84.1					84.1							
FO Overflow Tk	FO	35.9		35.9										
FO Day Tk PS	FO	15.2		15.2										
FO Day Tk SB	FO	15.2		15.2										
FO Settling Tk PS	FO	38.1		38.1										
FO Settling Tk SB	FO	38.1		38.1										
FO Tk 1 C	FO	100.3		100.3										
FO Tk 2 PS	FO	183.8		183.8										
FO Tk 2 SB	FO	183.8		183.8										
FO Tk 3 PS	FO	182.6		182.6										
FO Tk 3 SB	FO	182.6		182.6										
Liquid Mud Tk 1 PS	LM	362.0								362.0				
Liquid Mud Tk 1 SB	LM	362.0								362.0				
Liquid Mud Tk 2 PS	LM	286.8								286.8				
Liquid Mud Tk 2 SB	LM	286.8								286.8				
Liquid Mud Tk 4 PS	LM	341.3								341.3				
Liquid Mud Tk 4 SB	LM	341.3								341.3				
LM/Methanol Tk 3 PS	LM/METH	214.7								214.7	214.7			
LM/Methanol Tk 3 SB	LM/METH	214.7								214.7	214.7			
Lube Oil Tk	LO	1.9										1.9		
Dry Bulk Tk 1	Dry Bulk	83.2			83.2									
Dry Bulk Tk 2	Dry Bulk	83.2			83.2									
Dry Bulk Tk 3	Dry Bulk	83.2			83.2									
Dry Bulk Tk 4	Dry Bulk	83.2			83.2									
Dry Bulk Tk 5	Dry Bulk	83.2			83.2									
	Total Vol	ume [m ³]	0.0	975.8	415.8	1,832.2	167.9	2,006.2	0.0	2,409.7	429.4	1.9	0.0	0.0
Spec Shee	et Total Vol	ume [m ³]	0.0	909.4	415.8	328.3	167.9	2,006.2	0.0	2,409.7	429.4	1.9	0.0	0.0

*Capacities shown are for lead vessel. Actual capacities may vary slightly.


*Capacities shown in **RED** are excluded from the total volume.

*Capacities shown in **BLUE** are included in another Tank's Capacity.

*Capacities shown in GREEN are counted for multiple Tank Capacities.

ALDEMIR SOUZA TIDE DP Capability Plot



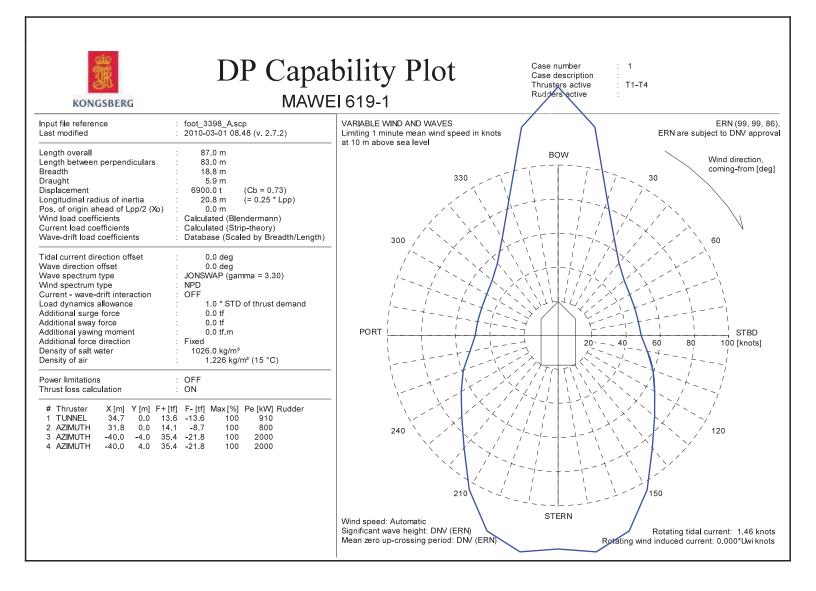

tdw.com

NOTICE: The data contained herein is provided for convenience of reference to allow users to determine the suitability of the Company's equipment. The data may vary from the current condition of equipment which can only be determined by physical inspection. Company has exercised due diligence to insure that the data contained herein is reasonably accurate. However, Company does not warrant the accuracy or completeness of the data. In no event shall Company be liable for any damages whatsoever arising out of the use or inability to use the data contained herein.